


DLA-48DBC/R



- ▷ Din rail plug-in surge protector
- ▷ 1-pair
- ▷ Un: 48 V
- ▷ Shield wire protection
- ▷ Without line cut-off
- ▷ IEC 61643-21 and UL497A compliance

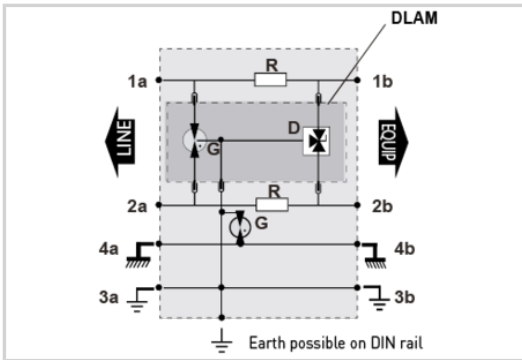

Electrical Characteristics		
Network		Fipway, WorldFIP, FieldBus-h2
Nominal line voltage	Un	48 V
Max. DC operating voltage	Uc	53 Vdc
Max. frequency	f max.	> 20 MHz
Insertion loss		< 1 dB
Max. load current	IL	300 mA
Max. discharge current max. withstand @ 8/20 μs by pole	Imax	20 kA
Line inductance		No
Protection level Following the test category C3 (IEC61643-21) - Line/Line	Up	75 V
Max. capacitance	C	< 50 pF
Impulse current 2 x 10/350μs Test - D1 Category	Iimp	5 kA
Nominal discharge current C2 Category	In	5 kA
Line resistance		< 4.7 Ohm
Mechanical Characteristics		
Technology		GDT+Clamping diode
SPD configuration		1-pair+shielded
Connection to Network		Spring terminal: cross section 0.5-2.5mm <sup>2</sup>
Format		Plug-in DIN box
Mounting		Symmetrical rail 35 mm (EN 60715)
Housing material		Thermoplastic UL94 V-0
Operating and storage temperature		-40/+85°C
Protection rating		IP20
Failsafe mode		Short-circuit
Disconnection indicator		Transmission interrupt - default mode 2
Spare module(s)		DLAM-48dBC
Dimensions		See diagram
Weight		0.065 kg
Standards		
Standards compliance		IEC 61643-21 / EN 61643-21 / UL497A
Certification		
Part number		
6404214		