


DLATS1-P24DC



- 1-pair dataline/telecom surge protection
- Local and Remote signaling of SPD status
- DIN rail mounting, Screw connect status
- Plug-in module
- 1 monitoring module + SPD modules (up to 48) + bus
- Discharge current I_{max}/I_n : 20 kA / 5kA
- Complies with IEC/EN 61643-21 and UL497A

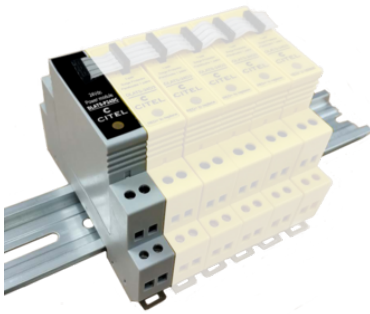

Connection ribbons available:

Nb of pole	Ref. Ribbon
2 - 5	R-BUS 5P (301134)
6 - 10	R-BUS 10P (301133)
11 - 25	R-BUS 25P (301135)
26 - 49	R-BUS 49P (301143)

Electrical Characteristics		
Nominal line voltage	Un	24 Vdc
Mechanical Characteristics		
Connection to Network		By screw terminal: cross section 0.4-1.5mm ² or spring terminal (DLATS-xxx/R)
Format		Plug-in DIN box
Housing material		Thermoplastic UL94 V-0
Operating temperature	Tu	-40/+85°C
Protection rating		IP20
Failsafe mode		Transmission cut-off - fault mode 2
Voltage/operating indicator		Green / Red
Remote signaling of disconnection		Trough control module
Dimensions		See diagram
Weight		0.019 kg
Standards		
Standards compliance		IEC 61643-21 / EN 61643-21 / UL497B / GB 18802.21
Part number		
6417231		