


P8AX09-B/MF/75



- RF coaxial surge protector
- 2 GHz
- 25 W
- Connectors : BNC
- Low insertion loss
- Removable GDT
- DC-pass
- Bi-directional protection

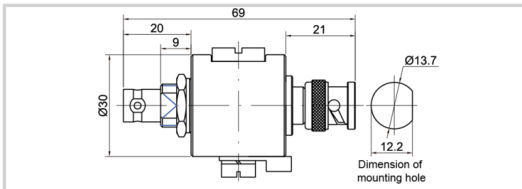

Electrical Characteristics			
Max. DC operating voltage	Uc		72 Vdc
Frequency range	f		DC-2 GHz
Insertion loss			< 0.2 dB
Return loss			> 20 dB
Impedance			75 ohms
VSWR			<1.2:1
Max. load current	IL		10 A
Residual Current Leakage current to Ground	Ipe		None
Max. discharge current max. withstand @ 8/20 µs by pole	I <sub>max</sub>		20 kA
Protection mode(s)			Common mode/Differential mode
Protection level@1kV/µs (C3)	Up		< 650 V
Impulse current 2 x 10/350µs Test - D1 Category	I <sub>imp</sub>		1 kA
Nominal discharge current C2 Category	I <sub>n</sub>		5 kA
Max Power			25 W
Typical let through energy(50 ohms) input 4kV 1.2/50µs - 2kA 8/20µs			300 µJ
DC Pass			Yes
Insulation resistance	IR		≥10 GOhms
Mechanical Characteristics			
Technology			Gas discharge tube
Connection to Network			Connector BNC Male/Female
Mounting			Feedthrough
Housing material			Brass/Surface plating: Cu Zn Sn
Operating temperature	Tu		-40/+85°C
Protection rating			IP65
Failsafe mode			Short-circuit
Disconnection indicator			Transmission interrupt
Spare module(s)			BBHF-90V
Dimensions			See diagram
Contacts			Bronze/Surface Au-Ag
Weight			0.138 kg
Standards			
Standards compliance			IEC 61643-21 / EN 61643-21 / UL497C / UL497E
RoHS compliance			Yes
Part number			
6006312			